



PAVEMENT MARKING REMOVAL

RS QUICK-CHANGE SYSTEM

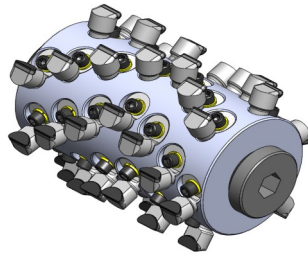


7"+ diameter drum for walk behind grinding machines

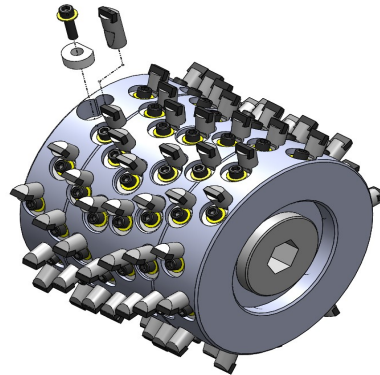


10"-20" diameter drums for truck mounted grooving and grinding machines



RS PCD Flat Tool



RS PCD Single Round



RS PCD Double Round

Replacement Drums Available for all Grinding Machines

- Interchangeable tools for different grinding applications
- Change the cutting width by simply adding or removing tools
- 100% surface coverage with Keystone's flat tool eliminates the need for multiple passes during pavement marking removal
- Increase production by 3 times when compared to diamond blades and flail teeth
- Minimize surface damage while grinding
- Precision machined block and tool ensures a uniform surface